

Single to three-phase converter modules



Specifications

IP 20 for indoor use
Short circuit proof
Ambient temperature: 55 deg C

Start-boosts: 6 sec

Supply voltage:

MB, BW: 230V, 0.37 to 3kW

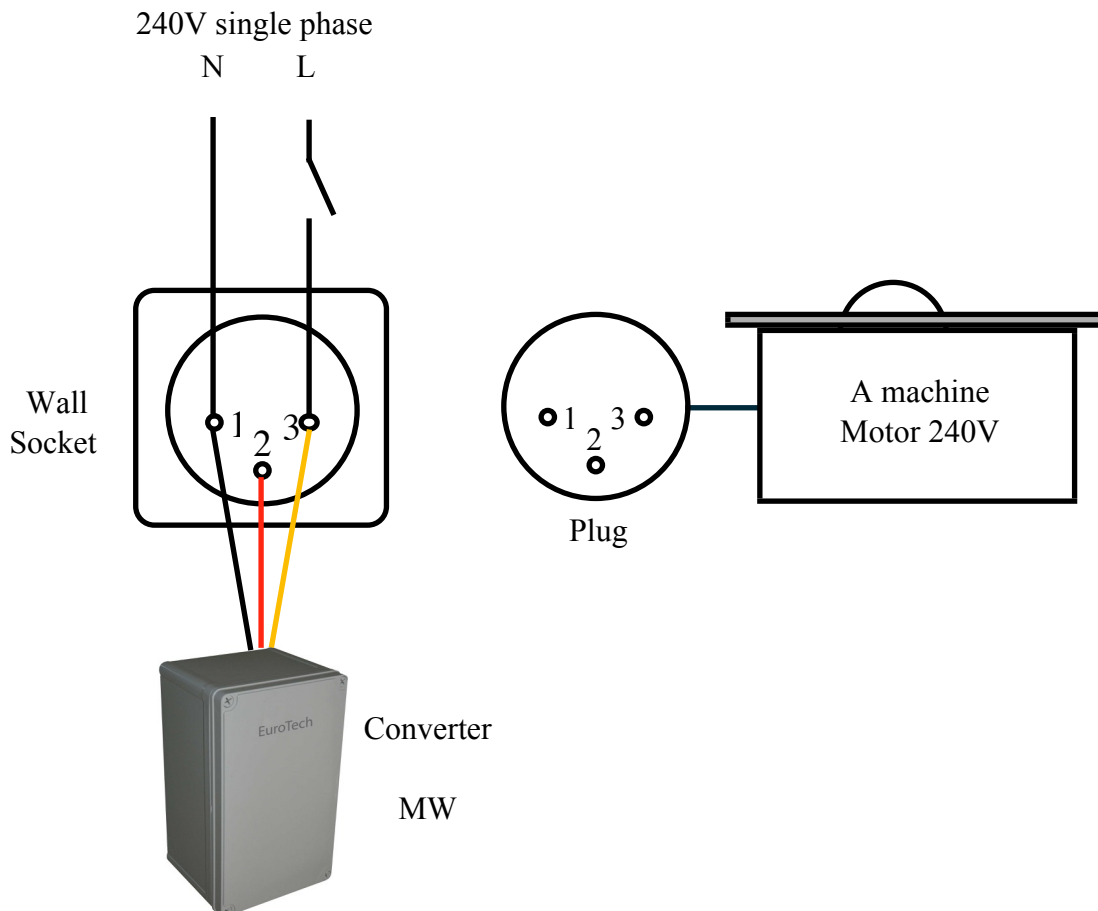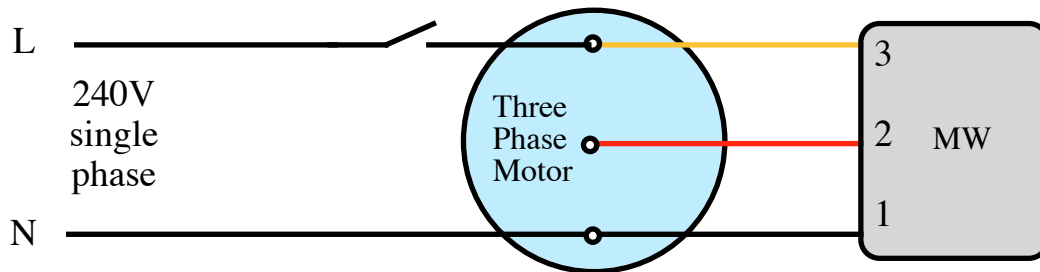

ME, CT and CF: 415V, 4 to 12kW

Voltage symmetry:

kW range:

MW: + - 12% no idler, 0.37kW - 3kW
 MB: + - 8% no idler, 0.37kW - 3kW

ME: + - 9% with idler, 4kW and 8kW
 CT: + - 4% with idler, 4kW and 8kW
 CF: + - 3% with idler, 12kW

